

# TOR KEL 900-series

## Battery Load Unit



- Batteries can be tested in service
- Dynamic discharge technology – full power at all voltages
- Safety in all details, e.g. detection of blocked airflow
- Real time monitoring during test
- Easy report function and calibration
- Easily expandable for larger battery banks using TXL extra load units
- Battery cell monitor control integrated in the system
- Can be used with Lead-Acid, Ni-Cd and other battery types

### DESCRIPTION

The TOR KEL™ 900 series is used to perform load/discharge testing which is the only way to determine battery systems actual capacity. Together with the optional cell voltage logger, BVM, connected directly to the TOR KEL 900, it becomes a complete, stand-alone, discharge test system.

TOR KEL comes in three models, 910, 930 and 950, see table below.

The high discharge capacity of TOR KEL gives the opportunity to shorten the test time. Discharging can take place at up to 220 A, and if higher current is needed, two or more TOR KEL units or extra load units, TXL, can be linked together. Tests can be conducted at constant current, constant power, constant resistance or in accordance with a pre-selected load profile.

Testing can also be carried out without disconnecting the battery from the equipment it serves. Via a DC clamp-on probe, TOR KEL measures the total battery current while regulating it at a constant level. Battery systems can be plus or minus grounded or free floating.


The test results can be presented and edited on a PC using the included PC software "TOR KEL Viewer".

### MODEL OVERVIEW

TOR KEL	910	930	950
Current (max)	110 A	220 A	220 A
Voltage (max)	300 V	300 V	500 V
BVM functionality	No	Yes	Yes
Charging measurement	No	Yes	Yes
Full report functionality	No	Yes	Yes

### APPLICATION EXAMPLE

The TOR KEL is connected to battery, the current and the voltage alarm levels are set. After starting the discharge, TOR KEL keeps the current constant at the preset level. When the voltage drops to a level slightly above the final voltage, TOR KEL issues an alarm. If the voltage drops so low that there is a risk for deep discharging the battery, TOR KEL shuts down the test. If the power supply is interrupted the test will continue when power is restored. All values are stored in TOR KEL and can easily be transferred via an USB-stick or ethernet cable to a PC for evaluation and print out.

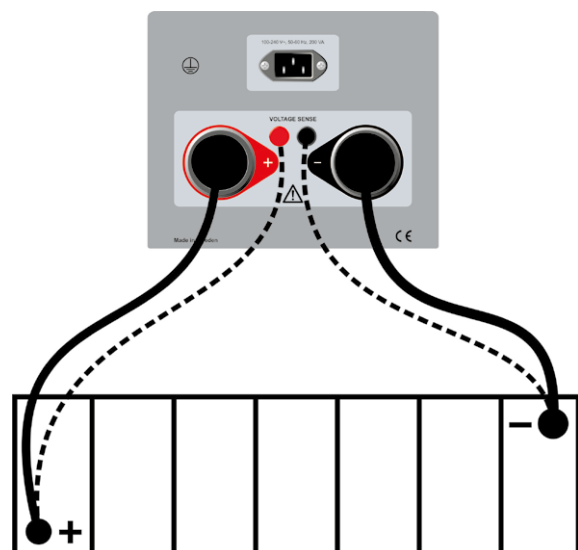


Separate sensing cables (dashed lines) should be used to get accurate voltage measurements to offset the voltage drop caused by long current cables and/or high current.


## TORKEL 900-series Battery Load Unit

### FEATURES AND BENEFITS

1. **TXL STOP**  
Output used for stop discharging from an external device (e.g. TXL). Galvanically isolated.
2. **SERVICE**  
Connector for service purposes only.
3. **ALARM**  
Output equipped with a relay contact for triggering an external alarm device.
4. **DC OUT**  
9 V output for external current clamp.
5. **IEXT ≤ 1 V**  
Input used to measure current in an external path by means of a clamp-on probe or a current shunt.
6. **Display**  
Touch screen 7"

7. **BVM1, BVM2**  
USB connections for BVM units.
8. **USB connection**  
For USB memory stick.
9. **Ethernet connection**  
For reports connected to PC
10. **EMERGENCY STOP**  
Push to stop.  
Reset by turning it cloch-wise
11. **Control knob**  
For entering settings etc. Press to confirm a setting.
12. **Buzzer**  
For alarms.
13. **ON/OFF switch**

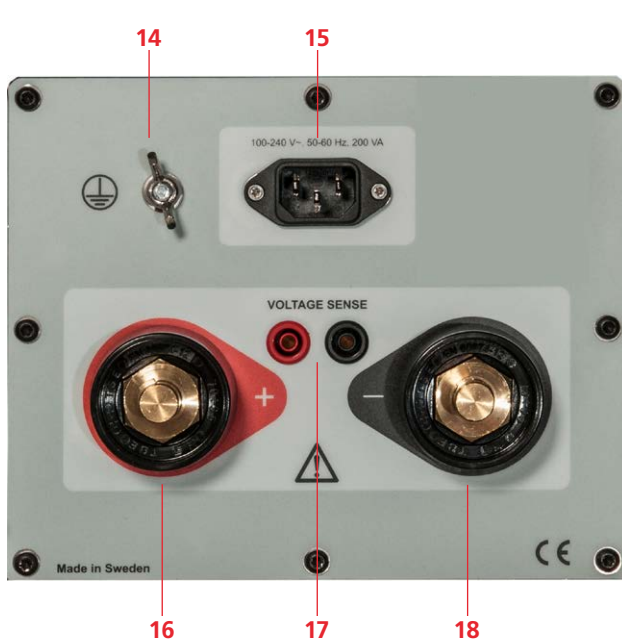

14.  Protective ground (earth) conductor terminal
15. **MAINS**  
Connector for mains supply.
16. **+**  
Connection terminal (+) for the battery (or other DC source).
17. **VOLTAGE SENSE**  
Input for sensing voltage at the battery terminals.  
Impedance to the battery current terminals is >1 MΩ.
18. **-**  
Connection terminal (-) for the battery (or other DC source).

## TOR KEL 900-series Battery Load Unit

### SPECIFICATIONS TOR KEL 900-SERIES

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

#### Environment

**Application field** The instrument is intended for use in high-voltage substations and industrial environments.

#### Temperature

**Operating** 0°C to +50°C (32°F to +122°F)  
Power derating at temperatures over +35°C (+95°F)

**Storage & transport** -40°C to +70°C (-40°F to +158°F)

**Humidity** 5% – 95% RH, non-condensing

#### Shock/Vibration/Fall

**Instrument only** ETSI EN 300 019-2-7 class 7M2

**Instrument in transport case** ISTA 2A

#### Altitude

**Operating** 3000 m (10000 ft)

**Storage** 10000 m (33000 ft)

**Encapsulation class** IP20

#### CE-marking

**LVD** 2014/35/EU

**EMC** 2014/30/EU

**RoHS** 2011/65/EU

#### General

**Mains voltage** 100 – 240 V AC, 50/60 Hz

**Power consumption** 200 W (max)

**Power interruption** 40 ms (max)

**Protection** Thermal cut-outs, Automatic overload protection, Emergency stop button

**Dimensions** 519x315x375 mm, (20.5" x 12.4" x 14.7")

**Weight** 19.5 kg (43.0 lbs) instrument  
31.9 kg (70.3 lbs) incl. standard transport case  
39,2 kg (86,4 lbs) incl. large transport case and cables

**Display** 7" LCD, Capacitive touch screen

**Available languages** Czech, English, French, German, Romanian, Russian, Spanish, Swedish

**Number of test files** 30 (max)

**Test time** 240 h (max)

#### Measurement section

##### Current measurement

**Display range** 0.0 to 2999.0 A

**Basic inaccuracy** ±(0.5% of reading +0.1 A)

**Resolution** 0.1 A

##### Internal current measurement

###### Range

TOR KEL 910 0 to 110 A

TOR KEL 930/950 0 to 220 A

##### Input for clamp-on probe

**Range** 0 to 1000 mV DC

**mV/A-ratio** 0.30 mV/A to 100.00 mV/A

**Input impedance** >1 MΩ

##### Voltage measurement

**Voltage** 0 to 500 V DC

**Inaccuracy** ±(0.5% of reading +0.1 V DC)

**Resolution** 0.1 V

**Sample rate** 10 Hz, Values are saved when change is >10 mV

#### Time measurement


**Inaccuracy** ±0.1% of reading ±1 digit

#### Load section

**Battery voltage** 7.5 V(3) to 300 V(1) / 500 V(2)

**Power** 15 kW (max)

**Load patterns** Constant current, constant power, constant resistance, current or power profile

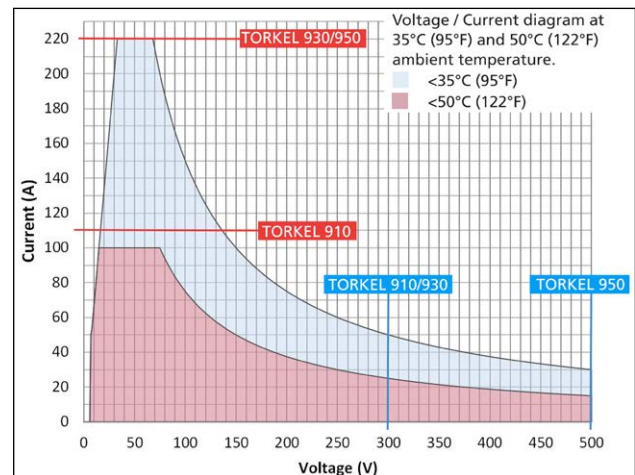

#### Constant I

##### Range

TOR KEL 910 0 to 110.0 A

TOR KEL 930/950 0 to 220.0 A

**Inaccuracy** ±(0.5% +0.2 A)

**Resolution** 0.1 A

**Ripple** max 0.5 A peak

#### Constant R

**Range** 300 mΩ to 3 kΩ

**Inaccuracy** ±1% typical

**Resolution** 100 mΩ

#### Constant P

**Range** 0 to 15 kW

**Inaccuracy** ±1% typical

**Resolution** 10 W

#### Inputs

**+** 7.5 to 300 V<sup>(1)</sup> 7.5 to 500 V<sup>(2)</sup>

**-** 0 V

**I EXT ≤ 1 V** 1 V DC, 300 V DC to ground

**VOLTAGE SENSE** Impedance to the current terminals is >1 MΩ

#### Outputs

##### ALARM

**Relay contact** 28 V DC, 8 A, 240 V AC, 8 A  
Devices higher than Cat II must not be attached

##### TXL STOP

**Relay contact** 250 VDC, 0.28 A, 28 VDC, 8 A, 250 VAC, 8 A  
9 V DC 9 V DC, ±7% max 100 mA

#### Communication ports

**BVM1 BVM2** USB connection for BVM units

USB connection for USB memory

For reports connected to PC

1) TOR KEL 910 and 930 2) TOR KEL 950

3) On sw from R02G. Min voltage is 2V

## TORKEL 900-series Battery Load Unit

### SPECIFICATIONS TXL830/850/865/870/890

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

#### Environment

**Application field** The instrument is intended for use in high-voltage substations and industrial environments.

#### Temperature

**Operating** 0°C to +40°C (32°F to +104°F)  
**Storage & transport** -40°C to +70°C (-40°F to +158°F)

**Humidity** 5% – 95% RH, non-condensing

#### CE-marking

**LVD** 2014/35/EU  
**EMC** 2014/30/EU  
**RoHS** 2011/65/EU

#### General

**Mains voltage** 100 – 240 V AC, 50/60 Hz  
**Power consumption** 75 W (max)  
**Protection** Thermal cut-outs, automatic overload protection  
**Dimensions**  
**Instrument** 210x353x600 mm (8.3" x 13.9" x 23.6")  
**Transport case** 710 x 310 x 520 (28" x 12.2" x 20.5")  
**Weight** Instrument 13 kg (29 lbs) 21,4 kg (47 lbs) with transport case

### Load section

	Voltage (DC) max.	Current max.	Power max.
<b>TXL830</b>	28 V	300 A	8.3 kW
<b>TXL850</b>	56 V	300 A	16.4 kW
<b>TXL865</b>	260 V (98 A max)	117 A	25.5 kW
<b>TXL870</b>	280 V (56 A max)	112 A	15.8 kW
<b>TXL890</b>	480 V (32 A max)	62 A	15.4 kW

### Internal resistance, 3-position selector

	Position 1	Position 2	Position 3
<b>TXL830</b>	0.275 Ω	0.138 Ω	0.092 Ω
<b>TXL850</b>	0.55 Ω	0.275 Ω	0.184 Ω
<b>TXL865</b>	2.65 Ω	5.05 Ω	0.12 Ω
<b>TXL870</b>	4.95 Ω	2.48 Ω	1.24 Ω
<b>TXL890</b>	14.10 Ω	7.05 Ω	3.52 Ω

### Maximal currents, 3-position selector<sup>1)</sup>

#### Position 1

	Current	Voltage	Cells	Cell voltage
<b>TXL830</b>	100 A	27.6 V	12	2.3 V
28 V max	78.5 A	21.6 V	12	1.8 V
<b>TXL850</b>	100 A	55.2 V	24	2.3 V
56 V max	78.5 A	43.2 V	24	1.8 V
<b>TXL865</b>	93.7 A	248.4 V	108	2.3 V
260 V max	73.4 A	194.4 V	108	1.8 V
<b>TXL870</b>	50.1 A	248.4 V	108	2.3 V
280 V max	39.2 A	194.4 V	108	1.8 V
<b>TXL890</b>	32.3 A	469.2 V	204	2.3 V
480 V max	26.0 A	367.2 V	204	1.8 V

#### Position 2

	Current	Voltage	Cells	Cell voltage
<b>TXL830</b>	200 A	27.6 V	12	2.3 V
28 V max	156 A	21.6 V	12	1.8 V
<b>TXL850</b>	200 A	55.2 V	24	2.3 V
56 V max	156 A	43.2 V	24	1.8 V
<b>TXL865</b>	49.2 A	248.4 V	108	2.3 V
260 V max	38.5 A	194.4 V	108	1.8 V
<b>TXL870</b>	50.1 A	124.2 V	54	2.3 V
280 V max	39.2 A	97.2 V	54	1.8 V
<b>TXL890</b>	35.2 A	248.4 V	108	2.3 V
480 V max	27.8 A	194.4 V	108	1.8 V

#### Position 3

	Current	Voltage	Cells	Cell voltage
<b>TXL830</b>	300 A	27.6 V	12	2.3 V
28 V max	235 A	21.6 V	12	1.8 V
<b>TXL850</b>	300 A	55.2 V	24	2.3 V
56 V max	235 A	43.2 V	24	1.8 V
<b>TXL865</b>	115 A	13.8 V	6	2.3 V
14 V max	90 A	10.8 V	6	1.8 V
<b>TXL870</b>	100 A	124.2 V	54	2.3 V
140 V max	74.8 A	97.2 V	54	1.8 V
<b>TXL890</b>	70.5 A	248.4 V	108	2.3 V
250 V max	55.2 A	194.4 V	108	1.8 V

1) The data examples apply to lead batteries.


## TOR KEL 900-series Battery Load Unit

### OPTIONAL ACCESSORIES

#### Extra loads




#### BVM - Battery Voltage Monitoring

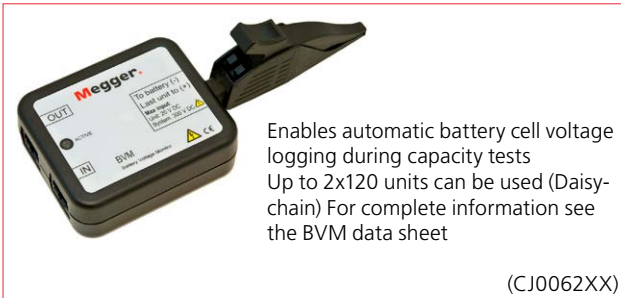

#### Sensing leads



#### Clamp-on-probe

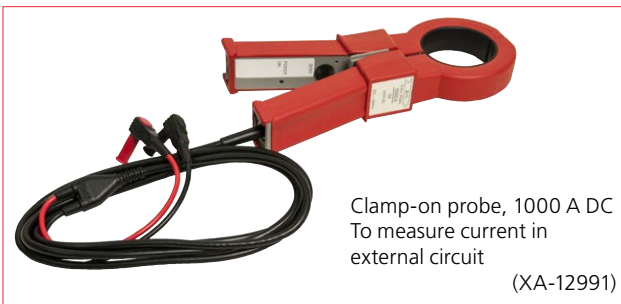

#### Software

PowerDB is a PC software for BVM and TOR KEL 800 / 900-series. For BVM and TOR KEL 800 series it works for controlling, data management and report handling. For TOR KEL 900-series only for data management and reporting.

#### Cable set Torkel 930/950



#### Extension cables

## TORHEL 900-series Battery Load Unit


### INCLUDED ACCESSORIES – TORHEL 910

#### Cable set



Cable set (GA-00550)

#### Ground Cable

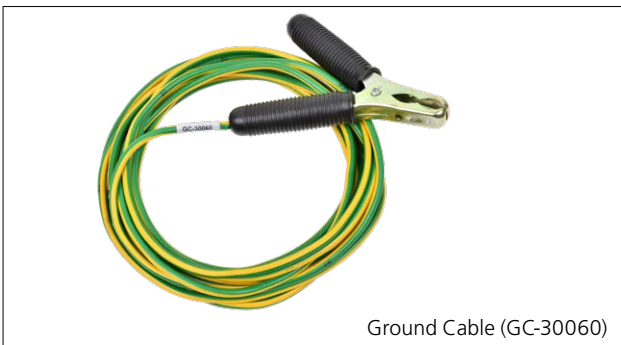

Ground Cable (GC-30060)


### INCLUDED ACCESSORIES – TORHEL 930/950

#### Cable set



Cable set (GA-09550)

### TORHEL Viewer

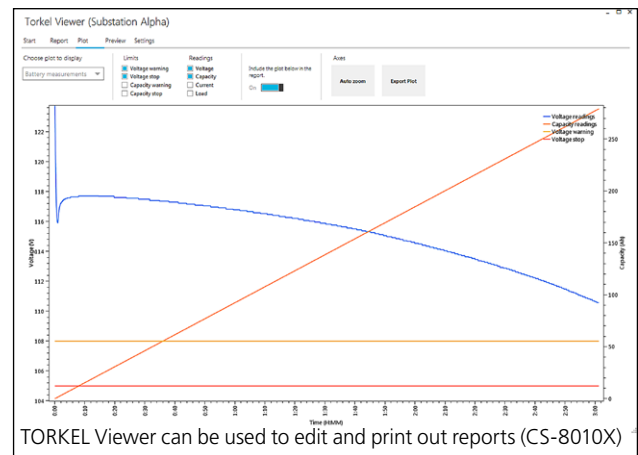

TORHEL Viewer can be used to edit and print out reports (CS-8010X)

TORHEL Viewer is a free software, download at [www.megger.com](http://www.megger.com) (search "TORHEL900" and submenu "Software"). Open the file and follow the instructions.

Please note that TORHEL Viewer can only be used with TORHEL930 and TORHEL950.

For TORHEL910, TORHEL Viewer cannot be used. A payable license fee for FW upgrade is needed. (E.g. material number CS-90010, "Upgrade Torkel 910 to 930")

## ORDERING INFORMATION

Item	Cat. No.
<b>TORKEL 910</b>	
Incl. transport case <b>Standard</b> <sup>1)</sup> and accessories:	
Mains cable	
Cable set, 2 x 3 m, 25 mm <sup>2</sup>	GA-00550
Soft case for cables	2012-180
CS-19190	
Incl. transport case <b>Large</b> <sup>2)</sup> and accessories:	
Mains cable	
Cable set, 2 x 3 m, 25 mm <sup>2</sup>	GA-00550
CS-19191	
<b>TORKEL 930</b>	
Incl. transport case <b>Standard</b> <sup>1)</sup> and accessories:	
Mains cable	
Cable set, 2 x 3 m, 70 mm <sup>2</sup>	GA-09550
Soft case for cables	2012-180
TORKEL Viewer	CS-8010X
USB memory stick	HF-10020
CS-19390	
Incl. transport case <b>Large</b> <sup>2)</sup> and accessories:	
Mains cable	
Cable set, 2 x 3 m, 70 mm <sup>2</sup>	GA-09550
TORKEL Viewer	CS-8010X
USB memory stick	HF-10020
CS-19391	
<b>TORKEL 950</b>	
Incl. transport case <b>Standard</b> <sup>1)</sup> and accessories:	
Mains cable	
Cable set, 2 x 3 m, 70 mm <sup>2</sup>	GA-09550
Soft case for cables	2012-180
TORKEL Viewer	CS-8010X
USB memory stick	HF-10020
CS-19590	
Incl. transport case <b>Large</b> <sup>2)</sup> and accessories:	
Mains cable	
Cable set, 2 x 3 m, 70 mm <sup>2</sup>	GA-09550
TORKEL Viewer	CS-8010X
USB memory stick	HF-10020
CS-19591	
Included in all models above:	
Ground cable, 5 m (16 ft) 2.5 mm <sup>2</sup>	GC-30060
<b>Optional accessories</b>	
Transport case <b>Standard</b> , for TORKEL (no cables)	GD-00954
Transport case <b>Large</b> for TORKEL and standard cables	GD-00955
<b>TXL830 Extra load</b>	
Incl. Cable set GA-09550, 2x3 m 70 m <sup>2</sup> *)	BS-59093
<b>TXL850 Extra load</b>	
Incl. Cable set GA-09550, 2x3 m 70 m <sup>2</sup> *)	BS-59095
<b>TXL865 Extra load</b>	
Incl. Cable set GA-00550, 2x3 m 25 m <sup>2</sup> *)	BS-59096
<b>TXL870 Extra load</b>	
Incl. Cable set GA-00550, 2x3 m 25 m <sup>2</sup> *)	BS-59097
<b>TXL890 Extra load</b>	
Incl. Cable set GA-00550, 2x3 m 25 m <sup>2</sup> *)	BS-59099
*) Control leads 2 x 2 m (6.5 ft), Transport case. Mains cable	

Item	Cat. No.
<b>Cable set</b>	
2 x 3 m, 25 mm <sup>2</sup> , female/clamp. 110 A. 3.0 kg (6.6 lbs)	GA-00550
<b>Extension cable</b>	
Extension for GA-00550, 2x3m, 25 mm <sup>2</sup> , male/female	GA-00552
<b>Cable set</b>	
2x3m, 50 mm <sup>2</sup> , female/clamp 220 A. 5.0 kg (11 lbs)	GA-00545
<b>Cable set, high rating</b>	
2 x 3 m, 70 mm <sup>2</sup> , female/fork. 270 A. 5.0 kg (11 lbs)	GA-09550
<b>Extension cable, high rating</b>	
Extension for GA-09550, and GA-00545, 2x3m, 70 mm <sup>2</sup> , male/female	GA-09552
<b>Sensing lead set</b>	
For measuring voltage at battery terminals. 2 x 5 m (16.4 ft)	GA-00210
<b>DC clamp-on probe, 1000 A</b>	
To measure current in external circuit	XA-12991
<b>BVM</b>	
Incl. Dolphin clips, Power & signal connectors, Power supplies, Connection cables and Carrying case	
<b>BVM150</b> , System of 16 BVM units	CJ-59092
<b>BVM300</b> , System of 31 BVM units	CJ-59093
<b>BVM600</b> , System of 61 BVM units	CJ-59096
<b>BVM special 600 V</b> , System of 46 BVM units <sup>3)</sup>	
Incl. Dolphin clips, Power & signal connectors, Opto couplers, Power supplies, Connection cables and Carrying case.	CJ-59198
<b>BVM, Single unit</b>	
Incl. Control cable black RJ45 0.5m (1.6 ft)	CJ-59090
<b>Extension cable</b>	
Extension lead for connecting BVM unit to battery, 0.5 m (1.6 ft)	04-30050
3) The TORKEL 950 can handle a maximum of 500 V. Battery systems over 500 V and up to 600 V can be tested with BVM and PowerDB application on a computer.	

- 1) Transport case **Standard**, GD-00954  
Size: 670x400x510 mm, (26.4x15.7x20.1")
- 2) Transport case **Large**, GD-00955  
Size: 795x400x510 mm, (31.3x15.7x20.1")



**Postal address**  
 Megger Sweden AB  
 Box 724  
 SE-182 17 Danderyd  
 SWEDEN  
 T +46 8 510 195 00  
 E seinfo@megger.com

**TORKEL900-series\_DS\_en\_V12**  
 ZI-CS01E • Doc. CS033664LE • 2022  
 Subject to change without notice  
 Megger Sweden AB  
 Registered to ISO 9001 and 14001  
 The word 'Megger' is a registered trademark  
 www.megger.com

Megger<sup>®</sup>