


Accessories

Susol

OCR Tester [OT]

• It is a device which can test for the operation of Trip Relay under no power condition.

1. Maximum 17 times the rated current can be inputted.
2. It is possible to enter the current value and phase on each of R/S/T/N
3. Frequency is adjustable.
4. It is able to test for long time delay/short time delay/instantaneous/ground fault.

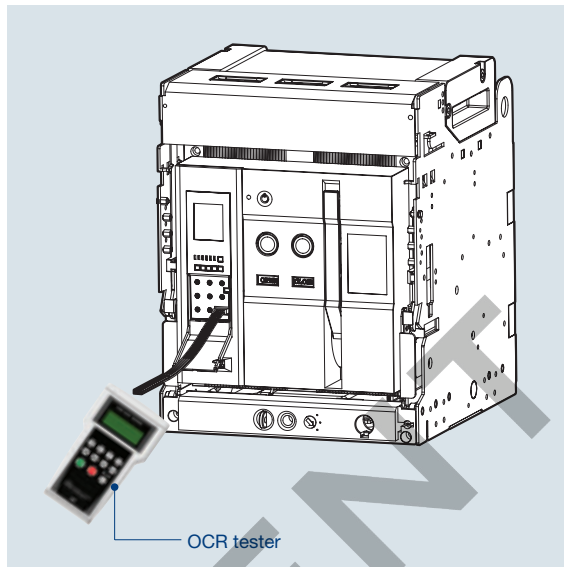

Configuration



R S T N	R, S, T, N phase signal input
⤴ ⤵	Increase/Decrease signal input
ENT. ESC	Signal setting/Delete
START STOP	Waveform generation/Stop
50Hz 60Hz Hz	Select frequency

* Non UL Listed.