

## High-voltage accessories

# Portable Capacitance Meter CB-2000

Efficient measurement and analysis of capacitors


Hitachi Energy's capacitance meter CB-2000 is characterized by its compact design and low weight, which makes it easy to carry when conducting measurements. No mains connection is required.

Measuring capacitance is an important part of the regular maintenance of capacitor banks. With the CB-2000, even large capacitor banks can be measured quickly and easily because no internal disconnections are necessary within the capacitor bank.

The CB-2000 is simple to use and easy to carry using the supplied shoulder strap. The measured values are clearly presented on the LCD display, which can be read both in daylight and in dark environments. The collected measurement values can be easily transferred to a PC for storage and analysis. The stored values from the PC can just as easily be transferred to the meter so that they are available when new measurements are made.

### Measurement principle


The test signal is generated from the installed rechargeable battery pack or power adapter and connected to the measurement object

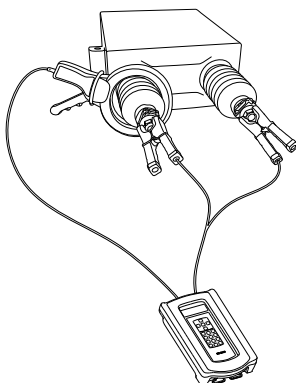

Measuring principle



with two voltage clips. The test voltage is 1.1–1.4 V. The test current is measured using a clip-on transformer that is easily positioned around the capacitor's bushing. For each measurement, the capacitance value, time and temperature are registered. The meter can handle data from five measurements per measurement object.

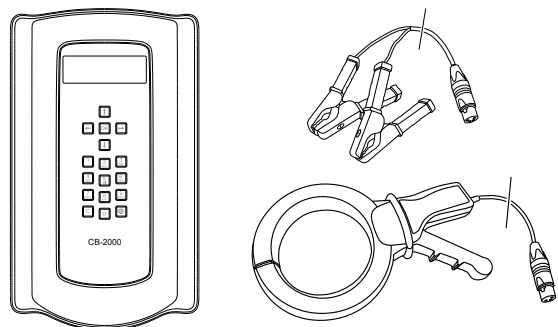

The capacitance meter is delivered complete with clip-on transformer, voltage clips, rechargeable NiMH-battery pack, power adapter, extra battery holder, USB-stick with software, casing and manual.



## Measurement data

Title	Title
Measuring range	0 – 1000 $\mu$ F
Measurement accuracy	$\pm$ 1.0%
Maximum load	2000 $\mu$ F
Test voltage	1.1 – 1.4 VAC pk – pk, 40 – 160 Hz
Weight (CB-2000)	2.4 kg
Operating time	More than 8 hours

## Analysis on PC

The CB-2000 is supplied with a program that enables the transfer of data to and from a PC via a USB cable. Prior to measurement, the CB-2000 can be prepared by uploading data from a previously conducted measurement. After the measurements are made, the measurement values can be stored and analyzed on a PC. Measurement data is saved as tab-delimited text, which can be opened in Excel or similar spreadsheet programs.

## Support and downloads

For more information and support, please visit:

[www.hitachienergy.com/offering/product-and-system/capacitors-and-filters](http://www.hitachienergy.com/offering/product-and-system/capacitors-and-filters)

Here you find the user's guide in different languages and also possibility to download the latest software.

**Hitachi Energy Sweden AB**  
 High Voltage Products  
 Power Capacitors  
 SE-771 80 Ludvika, Sweden  
 Phone: +46 (0)240 78 20 00  
 Fax: +46 (0)240 78 36 50  
 E-Mail: [capacitors.info@se.abb.com](mailto:capacitors.info@se.abb.com)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.